

Pabco Asphalt Shingles over felt roofing underlay on 15mm plywood.

225mm P & S Starter Course

Felt

ROOF FRAMES

Noggings must be provided by the main contractor as per this drawing, to allow for fixing of plywood.

50mm

10

Peel & Stick (P&S) starter course

PVC Channel

10mm Ventilation Gap

20mm min

10

Gutter/Spouting

Fascia



Plywood shall over-hang over the fascia by 50mm.


Roofing Underlay MUST have 100mm of Peel & Stick Starter Course Exposure for water-tight adhesion of Asphalt Shingles directly onto P & S Starter Course.

All gutters/spoutings shall be installed by the main contractor as per manufacturer's specifications.

All carpentry works and materials shall be provided by the main contractor, as per NZBC standards (3E04).

For roofing underlay & plywood installations, refer to Installation Guides.

AIR-FLOW DIAGRAM @ 1:5

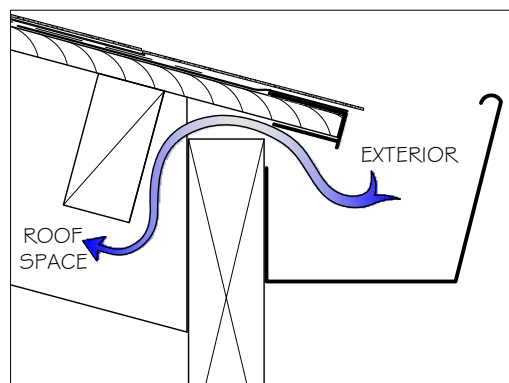

File Name:
2_30 - Eaves & Fascia Junction Detail.dwg

Scale:
1:2 @ A4

Drawn By:
Sae-woon Lim

Date:
28th January 2007

Drawing Name:
Eaves / Fascia Junction Detail

Sheet:
09

All constructions are to comply with New Zealand Building Standards and Territorial Authority Regulations. The contractor shall verify all dimensions and levels on site before commencing work. These drawings are not to be used for construction without Territorial Authority Consent. Do not attempt to reproduce these drawings in any unlawful manner without the consent of Asphalt Shingle Company Limited. These drawings may be utilised in order to create working drawings for submission to a Territorial Authority or certifier for consent purposes.

Asphalt Shingle Roofing New Zealand
 Ph: 09 626 0775 Fax: 09 626 0776 Free Ph: 0800 26 111 6
 e-mail: info@asphaltshingle.co.nz www.asphaltshingle.co.nz
 PO Box 24 580, Royal Oak, Auckland, New Zealand