



## **OPTION A.**



All rags **MUST NOT** restrict air movements through the ridge ventilation, therefore **MUST** provide sufficient spacings.

All carpentry works and materials shall be provided by the main contractor.

For roofing underlay & plywood installations, refer to Installation Guide bulletin.

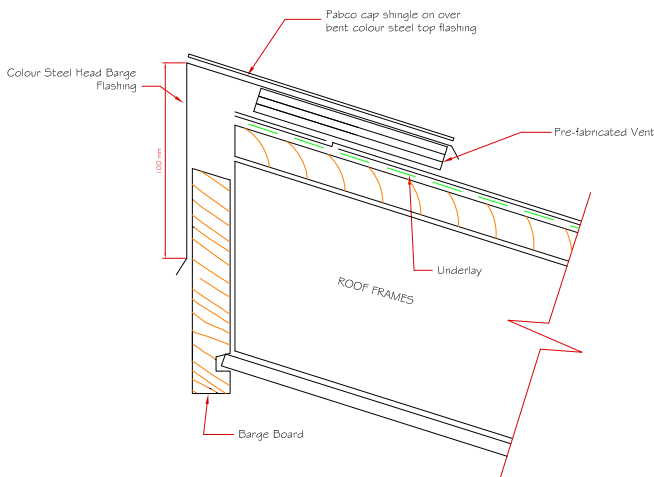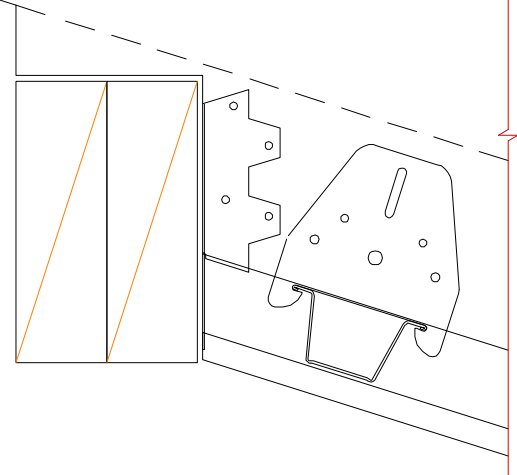

## **OPTION B.**

File Name:  
2.11 - Mono Pitch Head Flashing Detail.dwg

Scale:  
1:2 @ A4

Drawn By:  
I.M

Date:  
28th January 2013

Drawing Name:  
Mono Pitch Head Flashing Vent Options

Sheet:  
07

**ASPHALT SHINGLE**  
ROOFING SUPPLIES LTD

Ph: 09 636 7051 | Fax: 09 636 7053 | Free Ph: 0800 261 116 | e-mail: [info@asphaltshingle.co.nz](mailto:info@asphaltshingle.co.nz)  
[www.asphaltshingle.co.nz](http://www.asphaltshingle.co.nz) | PO Box 24 676, Royal Oak, Auckland, New Zealand

- \* All constructions are to comply with New Zealand Building Standards and Territorial Authority Regulations.
- \* The contractor shall verify all dimensions and levels on site before commencing work.
- \* These drawings are not to be used for construction without Territorial Authority Consent.
- \* Do not attempt to reproduce these drawings in any unlawful manner without the consent of Asphalt Shingle Roofing NZ.
- \* These drawings may be utilised in order to create working drawings for submission to a Territorial Authority or certifier for consent purposes.