


AIR-FLOW DIAGRAM @ 1:5

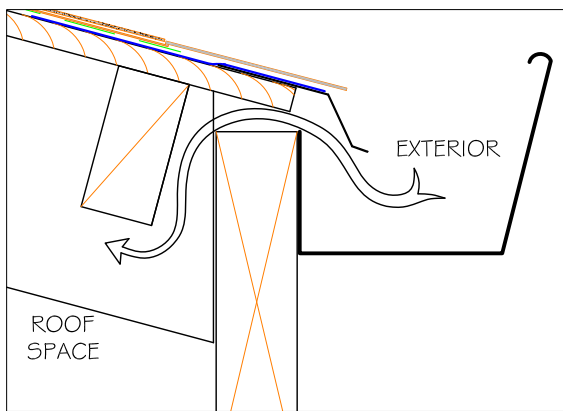

Roofing Underlay MUST have 100mm of Peel & Stick Starter Course Exposure for water-tight adhesion of Asphalt Shingles directly onto P & S Starter Course.

All gutters/spoutings shall be installed by the main contractor as per manufacturer's specifications.

All carpentry works and materials shall be provided by the main contractor, as per NZBC standards.

For roofing underlay & plywood installations, refer to Installation Guide bulletin.

File Name: 2.31 - Eaves & Fascia Junction Detail.dwg	Scale: 1:2 @ A4	Drawn By: I.M	Date: 28th January 2013
Drawing Name: Eaves / Fascia Junction Detail			Sheet: 09.1



Ph: 09 636 7051 | Fax: 09 636 7053 | Free Ph: 0800 261 116 | e-mail: info@asphaltshingle.co.nz  
www.asphaltshingle.co.nz | PO Box 24 676, Royal Oak, Auckland, New Zealand

- \* All constructions are to comply with New Zealand Building Standards and Territorial Authority Regulations.
- \* The contractor shall verify all dimensions and levels on site before commencing work.
- \* These drawings are not to be used for construction without Territorial Authority Consent.
- \* Do not attempt to reproduce these drawings in any unlawful manner without the consent of Asphalt Shingle Roofing NZ.
- \* These drawings may be utilised in order to create working drawings for submission to a Territorial Authority or certifier for consent purposes.